



**60**  
kN



DOUBLE  
ROLLER/TAPPER  
BEARING

**-50**  
kN



180  $\phi$ 35  
mm

1/2"  
BSP

250  
bar

1/2"  
BSP

250  
bar

300  
bar

**30**  
kN

**-25**  
kN

**1850**  
nm

**45**  
kg

**25**  
l/min

Hydraulic rotator FHR 6FD1 is ideal for professional use in forestry, agriculture, road and building construction, recycling industry, general cargo and material handling.

Rotator's upper mount is applied in FORK form factor of the knuckle joint. Robust and tough built to withstand even overloads. The fork width (between fork ends) is common standard width 80mm and the knuckle pin diameter 35mm.



FHL 02

Rotator lower mount is applied in FLANGE form factor to mount direct on grapple / tool surface by fixing with screws






$\phi$ 173  
17(x6)  
mm



1/2"  
BSP



1/2"  
BSP

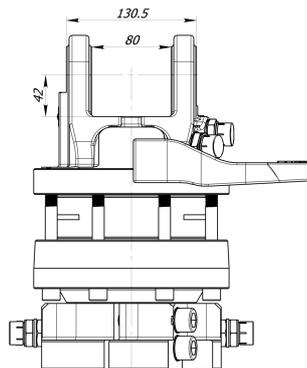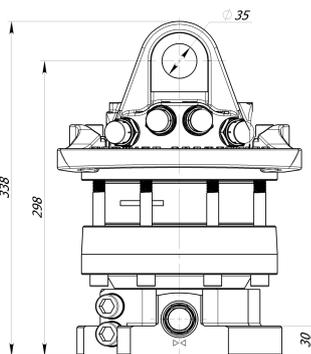

For additional information relating to price levels and technical data, please contact [sales@formiko.lv](mailto:sales@formiko.lv)

**Formiko Hydraulic s Ltd**

Dzirciema Str. 119 k-1,  
Riga LV1055 LATVIA

+371 294 49 552

+371 264 59 383

[sales@formiko.lv](mailto:sales@formiko.lv)

[www.formiko.lv](http://www.formiko.lv)

On request by special conditions there are metric nipples available for rotator FHR 6FD1



FORESTRY

GENERAL CARGO

AGRICULTURE

CONSTRUCTION

RECYCLING





Hydraulic rotator FHR 6FD1 is ideal for professional use in forestry, agriculture, road and building construction, recycling industry, general cargo and material handling.

 Rotator's upper mount is applied in FORK form factor of the knuckle joint. Robust and tough built to withstand even overloads. The fork width (between fork ends) is common standard width 80mm and the knuckle pin diameter 35mm.

 Rotator lower mount is applied in FLANGE form factor to mount direct on grapple / tool surface by fixing with screws

 Rotator FHR 6FD1 based on reliable vane type hydraulic motor which delivers torque up to 1850Nm at 25MPa.

 Formiko Hydraulics rotator FHR 6FD1 is equipped with double bearings to withstand both tensional and pushing loads.

 Formiko rotator FHR 6FD1 is compatible with FHL 02 series links.

 Rotator for shipping is packed in compact solid cardboard box with dimensions 400x250x250mm.

 We providing TWO year warranty for this rotator.

For additional information relating to price levels and technical data, please contact [sales@formiko.lv](mailto:sales@formiko.lv)

**Formiko Hydraulic s Ltd**

Dzirciema Str. 119 k-1,  
Riga LV1055 LATVIA

+371 294 49 552

+371 264 59 383

[sales@formiko.lv](mailto:sales@formiko.lv)

[www.formiko.lv](http://www.formiko.lv)

On request by special conditions there are metric nipples  
available for rotator FHR 6FD1

FORESTRY GENERAL CARGO AGRICULTURE CONSTRUCTION RECYCLING

